


UNIVERSAL PITCH SOL-A-VENT


Vents made from sturdy gauge aluminum, either primed for asphalt roof systems, PVC coated base for PVC systems or bare metal for other applications.

With no power connections Sol-A-Vent® is simply flashed to the deck, like other roof vents.

FLAT ROOF APPLICATION

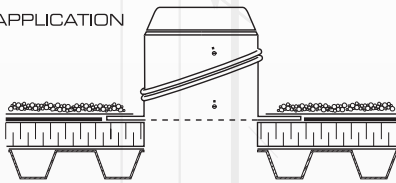

PITCHED ROOF APPLICATION

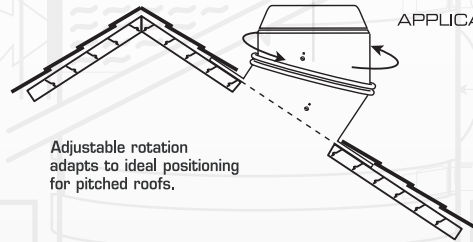

Adjustable rotation adapts to ideal positioning for pitched roofs.



The solar powered fan mechanism viewed from the under-side of the vent.

INSTALLATION:

Step 1: Before installing the Sol-A-Vent® set the appropriate desired angle of the solar panel relative to the roof pitch by 1) turning the vent stack on its base and by 2) rotating the top section of the adjustable seam. You will likely need to loosen the 4 slotted bolts on the vent stack sides to rotate the upper panels freely on the base flange.

Step 2: For the flat (horizontal) roof installation: Prepare an opening in the roof membrane and 8" opening in the roof insulation. Install the Sol-A-vent® beneath the roof membrane but on top of the insulation. Secure with nails or screws if appropriate. Flash in the base according to standard details for the roof membrane in use.

For a steep installation: After step 1, prepare an 8" opening in the roof deck to access the area to be vented. Attach the vent to the deck with screws or nails and make final adjustments to the desired angle of the Sol-A-Vent® panel. Re-tighten the 4 slotted bolts and then flash in the vent base appropriately.

SPECIFICATIONS:

- Plain aluminum. Optional asphalt coated flange at no charge
- Optional PVC coated base for PVC roof membrane
- Optional chrome cap at an extra cost on aluminum vent body

WARNING
Cancer and Reproductive Harm
www.P65Warnings.ca.gov

PVC Only

MANUFACTURER/WARRANTY

Marathon Roofing Products offers more than 30 years experience supplying the roofing industry with quality roof drains, vents, breathers and roof accessories. Products for both new and replacement roofing are adaptable to all roof systems to provide reliable and long life performance. Marathon roof drain assemblies can also be custom fabricated to meet almost any situation.

Marathon products are inspected and warranted. Any product proven to be defective within one year of installation will be replaced or cost price refunded, at the Company's option, subject to minor limitations.

Model	Height	Stake Diameter	Flange Dimensions	Weight	Pkg'd Ctn.
MS-A	10" 254 mm	8" 203 mm	16x16" 406x406 mm	2 1/4 lbs. 1 kg	2