


ALUMINATOR

Features

- ALL Aluminum Retrofit Drain
- Spun Aluminum for Quick & Easy Installation
- Heavy Duty 1 1/4" Tall Aluminum Ring
- 12 Scallops to Maximize Drainage
- Seep Holes on Bottom of Ring & Bolt-in-Place
- 3 Bolt Aluminum Strainer that is 10" Diameter
- Standard with ProSeal Rubber Seal
- Larger Stud Diameter for Increased Strength of Hardware
- Available in Sizes of 2", 3", 4", 5", 6" & 8"
- Strong Mechanical Seal that Prevents Water Back-up Issues
- Flange Diameter 16"
- Drain Outlet Length 12"
- 3", 4", 5" & 6" Sizes Certified by QAI

Options/Accessories

- Spun aluminum overflow ring option is designed to use with all of our aluminum drains with clamping ring, providing additional drainage when water levels exceed 2 inches
- 2.75" Low Profile Strainer
- PVC or TPO Coating options on the Flange for direct, hot air welding of PVC or TPO type roofing membranes



Seal Expansion Capacities


Drain Size	Starting OD of Seal/Outlet	Fits into Pipe ID	Max.Expansion Diameter of Seal	ID of Seal
3"	2.85"	2-7/8" - 3-1/4"	3.40"	2.19"
4"	3.80"	3-7/8" - 4-1/4"	4.40"	3.12"
5"	4.80"	4-7/8" - 5-1/4"	5.40"	4.15"
6"	5.70"	5-7/8" - 6-1/4"	6.40"	5"

Due to variations in manufacturing and job site inconsistencies the data are guidelines only and are not guaranteed for any specific situations.

Flow Capacity

Size	GPM
3"	45
4"	85
5"	180
6"	210

Drains were able to perform at the peak rates with a head of water of 3 1/4" or less.

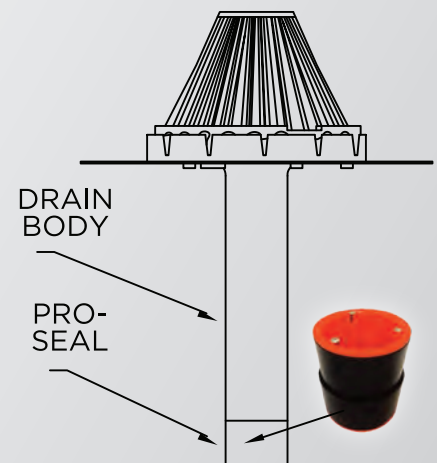

Scan for Full Product Details!



800.828.8424
marathondrains.com