



ECONOMY CENTURY


Features

- Quick & Easy to Install
- Adapts to All Types of Membranes & Roof Systems
- Provides Flexible Expansion Type Connections to Plumbing
- Positive Seal to Roof Membranes
- Constructed of 16oz. Copper
- ABS Clamping Ring Style for Single-Ply Systems
- Bolt In Place Plastic Strainer

Options/Accessories

- Aluminum Strainer
- Aluminum Low Profile Strainer (2-3/4" Tall)
- Cast Iron Strainer
- Aluminum Clamping Ring
- Metal Clamping Ring
- TPO or PVC Coated Flange
- Available in Sizes of 2", 3", 4" & 6"
- Available in Non-Standard & Custom Sizes
- Available without Clamping Ring

Copper new installation / direct connect roof drain with 14" flange, ABS clamping ring and polyethylene strainer.

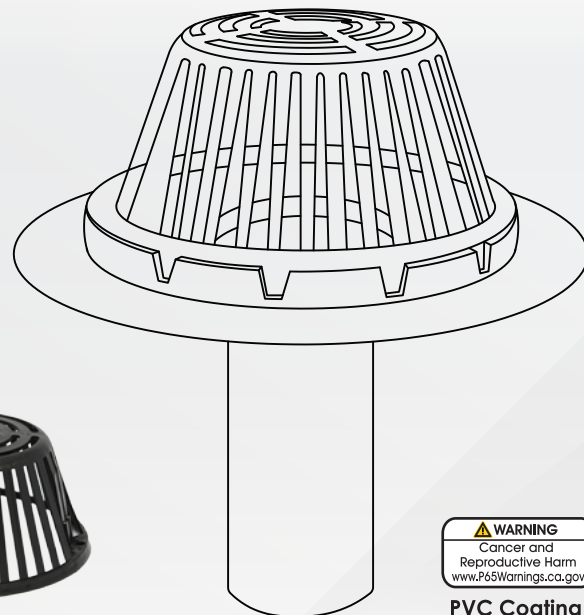

PVC Coating Only

Precision Details

		Century Straight Style				Outlet Dimensions					
Drain	Pipe Size	Cat #	Specification	Flange	Size	Inside	Diameter	Outside	Diameter	Overall	Length
2"	51 mm	CS29	CS 200x9	14"	356 mm	2"	51 mm	2.125"	54 mm	9"	229 mm
3"	76 mm	CS39	CS 300x9	14"	356 mm	3"	76 mm	3.125"	79 mm	9"	229 mm
4"	102 mm	CS49	CS 400x9	14"	356 mm	4"	102 mm	4.125"	105 mm	9"	229 mm
2"	51 mm	CS29 CR(E)	CS 200x9 CR(SF)	14"	356 mm	2"	51 mm	2.125"	54 mm	9"	229 mm
3"	76 mm	CS39 CR(E)	CS 300x9 CR(SF)	14"	356 mm	3"	76 mm	3.125"	79 mm	9"	229 mm
4"	102 mm	CS49 CR(E)	CS 400x9 CR(SF)	14"	356 mm	4"	102 mm	4.125"	105 mm	9"	229 m

* Longer length available upon request.

Scan for Full Product Details!



800.828.8424
marathondrains.com