



MARA-FLEX

Flashing


Features

- Quality Roof Flashings of Heavy Duty Material to Provide Reliable Long Life Performance
- The Standard Rippled Portion of the Flashing Outlet Offers an Accordion Action to Accommodate Variable Applications
- Designed to Fit All Pitches of Roof

Quality roof flashings made of lead that are designed to meet building codes flashing requirements. Designed to fit all pitches of roofs and available in many sizes and full sheets.


Precision Details

Size	Model	Description	Base	Qty/Ctn	Wt/Ctn
2" 51mm	225	2.5 lbs. Flashing	12"x12"	12	46 lbs. 21 kg
	240	4.0 lbs. Flashing	12"x12"	12	73 lbs. 33 kg
3" 76mm	325	2.5 lbs. Flashing	12"x12"	6	27 lbs. 12 kg
	340	4.0 lbs. Flashing	12"x12"	6	43 lbs. 20 kg
4" 102mm	425	2.5 lbs. Flashing	12"x12"	6	30 lbs. 14 kg
	440	4.0 lbs. Flashing	12"x12"	6	48 lbs. 22 kg
5" 127mm	525	2.5 lbs. Flashing	12"x12"	6	43 lbs. 20 kg




Step 1

Install MARA-FLEX roof flashing over the vent pipe. Press down with enough force to fit the upper side to the roof pitch.

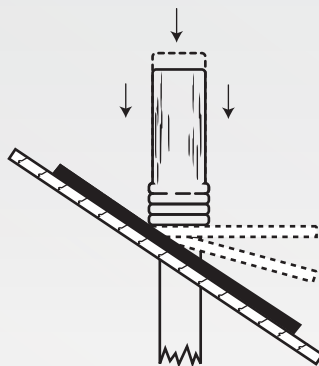

Step 2


Fit lower side to roof pitch by raising and dropping sharply several times until fit is correct.

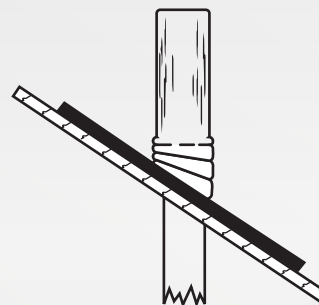

Step 3

Ensure position is perpendicular and flange sits flush to roof.

Scan for Full Product Details!



800.828.8424
marathondrains.com