

Our SE Series is recognized as the market's most exclusive solution to sloping surfaces. It is capable of providing exceptional results due to its self-leveling head, compensating slopes up to 5%.

The adjustment is performed using a the **Adjustment Key**, which can be applied from above once the flooring has been installed and guarantees the precision alignment of the entire floor surface.



Both features help to dramatically cut down installation time, resulting in lower labor costs. They also help reduce possible injuries from continuous lifting of heavy pavers in order to achieve a level surface.



FEATURES

- Polypropylene & Rubber (Head Top Finishing) (Recyclable Material)
- Self-Leveling Head Automatically Compensates Slopes Up To 5%
- Bi-Material Self-Leveling Head Offers Anti-Noise & Anti-Slip
- Adjustable Heights
- Made From 100% Recycled Material
- Removable Spacer Tabs
- Smooth Base With Pre-Cut Lines

Specifications

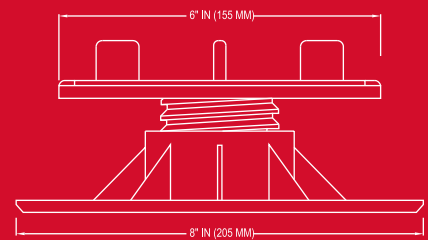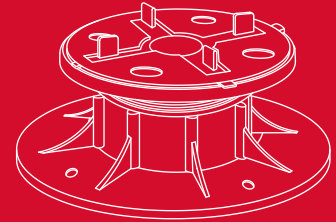

SELF-LEVELING HEAD



3310 N. Benzing Road
Orchard Park, NY 14127

800.828.8424
www.mrpsupports.com



DIMENSIONS

| | |
|---------------|---|
| Base Diameter | 8" |
| Head Diameter | 6" |
| Tab Height | 1/2" |
| Tab Width | 5/32" |
| Load Capacity | 2,205 lbs. |
| Height Range* | 1.125" - 21.75" * Higher with Extensions |

ADJUSTMENT KEY



SE – SELF-LEVELING ADJUSTABLE PEDESTAL Specifications



Pedestals

Part of our commitment to customer service is our pedestal software. Our CAD program allows easy, simple and precise calculations not only for the number and type of paving supports needed, but also the total area size, number of full and cut tiles and much more!



LIGHT PAVERS

Light pavers require the use of our self-leveling head with locking fixed piece. This allows the head to be fixed, as the self-leveling head is not recommended due to the light weight of the tile. Installing our IPE wood deck tiles also require our four pins that allow the tile to lock into the head. Our EH fixed supports are also available for heights less than 1.125".



HEAVY PAVERS

Concrete or porcelain pavers should be installed using exclusive self-leveling, bi-component head that allows automatic compensation of the imperfections and the slope of the substrate. Our EH fixed supports are also available for heights less than 1.125".



ALUMINUM JOISTS

Aluminum joists are an option as a substrate for an elevated system. Our special aluminum joist head locks the aluminum joist to the head. Aluminum tabs anchor the decking in a simple and reliable way for the installer. Can be used with wood and ceramic decking applications.



WOOD JOISTS & PLANKS

Our pedestal supports can be used for all types of substructure joists including wood joists. For this application our standard SE support is used with our exclusive self-leveling wood joist head that is supplied with screw slots to secure the wood joist to our head.

| | |
|---|---|
| SE 0 1.125"-1.5" in 28-38 mm | SE 1 1.5"-2" in 37.5-50 mm |
| SE 2 2"-3" in 50-75 mm | SE 3 3"-4.75" in 75-120 mm |
| SE 4 4.75"-6.75" in 120-170 mm | SE 5 6.75"-8.5" in 170-215 mm |
| SE 6 5.5"-9" in 140-230 mm | SE 7 7.25"-10.75" in 185-275 mm |
| SE 8 9.25"-12.75" in 235-325 mm | SE 9 8"-13.5" in 205-345 mm |
| SE 10 9.875"-15" in 250-385 mm | SE 11 11.75"-15.75" in 300-400 mm |
| SE 12 10.5"-18" in 270-455 mm | SE 13 12.4"-19.75" in 315-500 mm |
| SE 14 14.25"-21.75" in 365-550 mm | |



800.828.8424
www.mrpsupports.com