



## PREMIUM CENTURY


### Features

- Quick & Easy to Install
- Adapts to All Types of Membranes & Roof Systems
- Provides Flexible Expansion Type Connections to Plumbing
- Positive Seal to Roof Membranes
- Constructed of 20 oz. Copper
- ABS Clamping Ring Style for Single-Ply Systems
- Bolt in Place Plastic Strainer

### Options/Accessories

- Aluminum Strainer
- Aluminum Low Profile Strainer (2-3/4" Tall)
- Cast Iron Strainer
- Aluminum Clamping Ring
- Metal Clamping Ring
- TPO or PVC Coated Flange
- Available in Sizes of 2", 3", 4" & 6"
- Available in Non-Standard & Custom Sizes
- Available without Clamping Ring

Copper new installation/direct connect roof drain with 18" flange, ABS clamping ring and polyethylene strainer.

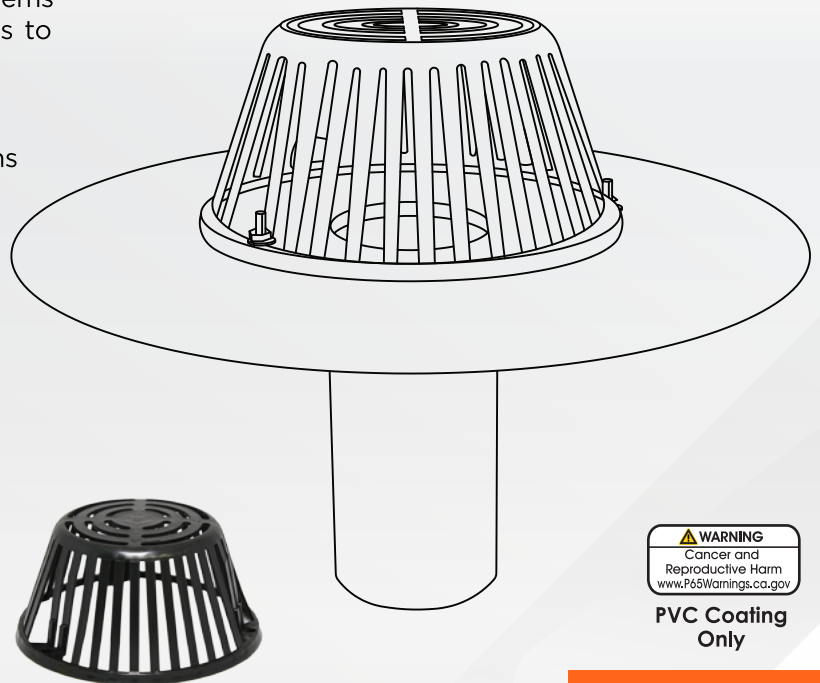

PVC Coating Only

### Precision Details

		Century Straight Style				Straight w/ Clamping		Outlet Dimensions					
Drain	Pipe Size	Cat #	Specification	Flange	Size	Cat #	Specification	Inside	Dia.	Outside	Dia.	Overall	Length
2"	51 mm	CPS29	CPS 200x9	18"	457 mm	CPS29 CR	CPS 200x9 CR	2"	51 mm	2.125"	54 mm	9"	229 mm
3"	76 mm	CPS39	CPS 300x9	18"	457 mm	CPS39 CR	CPS 300x9 CR	3"	76 mm	3.125"	79 mm	9"	229 mm
4"	102 mm	CPS49	CPS 400x9	18"	457 mm	CPS49 CR	CPS 400x9 CR	4"	102 mm	4.125"	105 mm	9"	229 mm
6"	152 mm	CPS69	CPS 600x9	18"	457 mm	CPS69 CR	CPS 600x9 CR	6"	152 mm	6.125"	156 mm	9"	229 mm
2"	51 mm	CPS215	CPS 200x15	18"	457 mm	CPS215 CR	CPS 200x15 CR	2"	51 mm	2.125"	54 mm	15"	381 mm
3"	76 mm	CPS315	CPS 300x15	18"	457 mm	CPS315 CR	CPS 300x15 CR	3"	76 mm	3.125"	79 mm	15"	381 mm
4"	102 mm	CPS415	CPS 400x15	18"	457 mm	CPS415 CR	CPS 400x15 CR	4"	102 mm	4.125"	105 mm	15"	381 mm
6"	152 mm	CPS615	CPS 600x15	18"	457 mm	CPS615 CR	CPS 600x15 CR	6"	152 mm	6.125"	156 mm	15"	381 mm

\* Longer length available upon request.

Scan for Full Product Details!



800.828.8424  
marathondrains.com