



RD-200 SERIES

Features

- Engineered with Cast Iron for Long Life & Durability
- Self-Locking Polyethylene Dome (Standard) & No Hub (Standard) Outlet Simplifies Installation & Maintenance
- Flashing Clamp & Integral Gravel Stop Ensure Reliable Drainage

Options/Accessories


- Sump Receiver
- Underdeck Clamp
- Deck Flange/Adjustable Extension
- Aluminum Strainer
- Cast Iron Strainer
- Vandal Proof Strainer
- 2" External Water Dam
- Available in 2", 3" & 4"
- Available in PVC Body

RD-200 epoxy coated cast iron roof drain with flashing clamp with integral gravel stop, self-locking polyethylene dome (standard) and no hub (standard) outlet. Constructed to withstand climate and the rigors of long-term use.

Precision Details

Pipe Size	No Hub	Push On	Threaded
2" (50)	4-5/8" (117)	7-1/4" (184)	11-5/16" (287)
3" (76)	4-3/32" (104)	5-3/4" (146)	9-13/16" (249)
4" (102)	4-1/32" (92)	4-1/32" (102)	8-3/32" (206)

Free Area Sq. In: 35
Deck Opening 6-1/2" (165)
With Sump Receiver 8" (203)

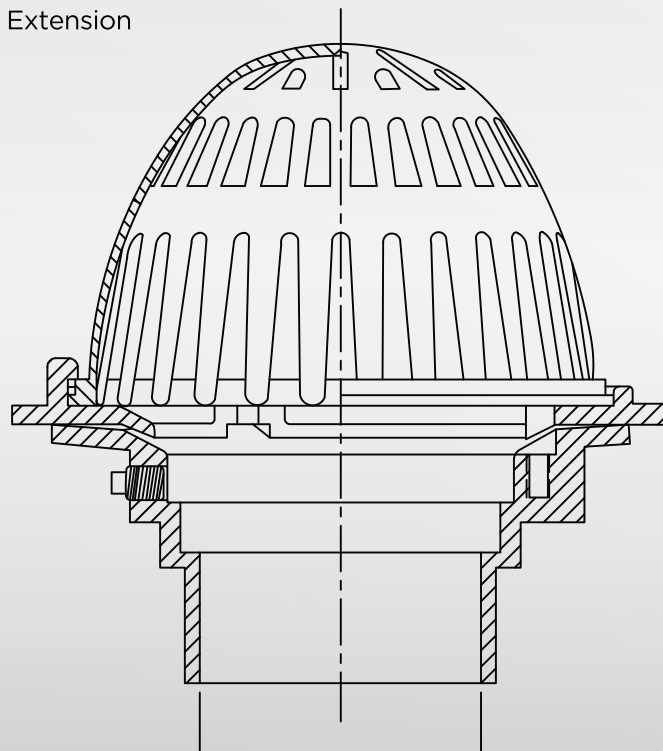

PVC Coating
Only

Scan for Full
Product Details!



800.828.8424
marathondrains.com

RD-200-R

RD-200-R epoxy coated cast iron overflow roof drain with flashing clamp with integral 2 in. (51mm) high external water dam, self locking polyethylene dome (standard), and no hub (standard) outlet.



Precision Details

Pipe Size	No Hub	Push On	Threaded
2" (50)	3-5/8" (92)	4-1/4" (108)	4-1/4" (108)
3" (76)	3-5/8" (92)	4-1/4" (108)	4-1/4" (108)
4" (102)	3-5/8" (92)	4-1/4" (108)	4-1/4" (108)

Free Area Sq. In: 35
Deck Opening 6-1/2" (165)
With Sump Receiver 8" (203)

RD-200-SO


RD-200-SO epoxy coated cast iron side outlet roof drain with flashing clamp with integral gravel stop, self-locking polyethylene dome (standard), and no hub (standard) outlet.



Precision Details

Pipe Size	A	B	C
2" (50)	4-5/8" (117)	7-1/4" (184)	11-5/16" (287)
3" (76)	4-3/32" (104)	5-3/4" (146)	9-13/16" (249)
4" (102)	4-1/32" (92)	4-1/32" (102)	8-3/32" (206)

Free Area Sq. In: 35
Deck Opening:
6-1/2" (165)
With Sump
Receiver 8"
(203)

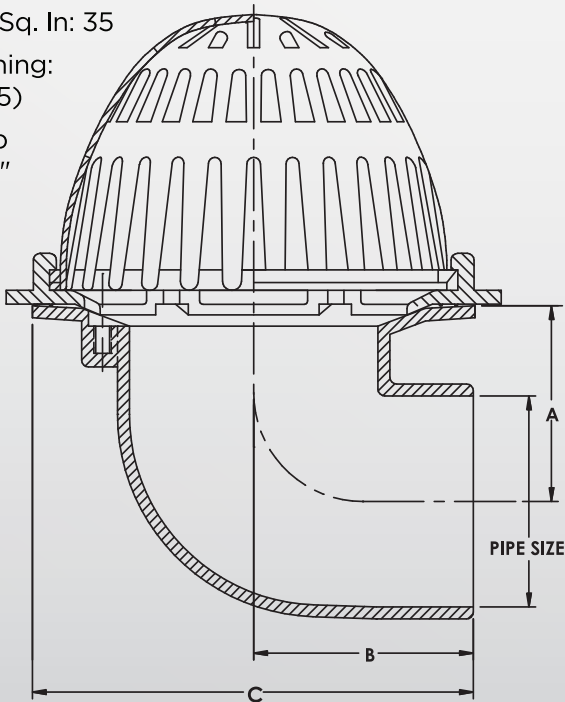

800.828.8424
marathondrains.com

RD-200-W

RD-200-W epoxy coated cast iron overflow roof drain with flashing clamp with integral 4" (102mm) tall standpipe, self-locking polyethylene dome (standard), and no hub (standard) outlet.



Precision Details

Pipe Size	No Hub	Push On	Threaded	Inside Caulk	PVC/ABS
2" (50)	3-5/8" (92)	4-1/4" (108)	4-1/4" (108)	4-1/4" (108)	3-3/4" (95)
3" (76)	3-5/8" (92)	4-1/4" (108)	4-1/4" (108)	4-1/4" (108)	3-5/8" (92)
4" (102)	3-5/8" (92)	4-1/4" (108)	4-1/4" (108)	4-1/4" (108)	3-7/8" (94)

Free Area Sq. In: 35
Deck Opening 6-1/2" (165)
With Sump Receiver 8" (203)

RD-200-CP

RD-200-CP epoxy coated cast iron promenade roof drain with integral slot drainage, 8 x 8 in. (203 x 203 mm) square heel-proof epoxy coated ductile iron promenade top, and no hub (standard) outlet. Optional features include push-on connection, threaded outlet, vandal-proof top, and flashing collar.



Precision Details

Pipe Size	No Hub	Push On	Threaded
2" (50)	3-5/8" (92)	4-1/4" (108)	4-1/4" (108)
3" (76)	3-5/8" (92)	4-1/4" (108)	4-1/4" (108)
4" (102)	3-5/8" (92)	4-1/4" (108)	4-1/4" (108)

Free Area Sq. In: 15

Options/Accessories

- Sump Receiver
- Underdeck Clamp
- Deck Flange/Adjustable Extension
- Aluminum Strainer
- Cast Iron Strainer
- Vandal Proof Strainer
- Available in 2", 3" & 4"



PVC Coating
Only